



Bobcat®

COMPACT TRACK LOADER

T66

Operating Weight	4049 kg
Engine Power	74 HP (55.2kW)
Rated Operating Capacity (50% of tipping load)	1606 kg



Bobcat SNS

Scan to enter Bobcat Youtube Channel!

One Tough Animal

T66 T4 - SPECIFICATIONS

Loader Series

Rated Operating Capacity (35% of tipping load, ISO 14351-1)	1124 kg (2478 lb.)
Rated Operating Capacity (50% of tipping load)	1606 kg (3540 lb.)
Tipping Load (ISO 14397-2)	3212 kg (7080 lb.)
ROC with Torsion	1066 kg (2350 lb.)
Height to Bucket Hinge Pin	3048 mm (120.0 in.)
Lift Arm Path	Vertical

Size and Speed

Operating Weight	4049 kg (8927 lb.)
Width with Bucket	1727 mm (68 in.)
Height with Cab	2045 mm (80.5 in.)
Travel Speed – Low Range	11.6 km/h (7.2 mph)
Travel Speed – High Range (optional 2-Speed travel)	16.4 km/h (10.2 mph)

Engine

Horsepower	74 HP (55.2kW) (T4)
Type	Turbo Diesel
Fuel Tank Capacity	107.1 L (28.3 gal)
Horsepower Management	Included with SJC Option

Tires/Tracks/Undercarriage

Track Width - Standard	320 mm (12.6 in.)
Track Width - Optional	400 mm (15.75 in.)
Ground Pressure (with standard tracks)	5.9 psi
Ground Pressure (with optional tracks)	4.8 psi
Length of Track on Ground	1378 mm
5-Link Torsion Suspension Undercarriage	Opt
Grease Cylinder Track Tensioning	Std

Control Options

Bobcat Standard (foot pedals/steering levers)	Std
---	-----

Hydraulic System

Hydraulic System Pressure	23.8-24.5 MPa (3450-3550 psi)
Hydraulic Standard Flow	66.5 L/min (17.6 gpm)
Hydraulic High Flow (optional)	101.8 L/min (26.9 gpm)
Pressure Release Hydraulic Quick Couplers	Std
Speed Management	Included with SJC Option

Standard Features

ROPS/FOPS Approved Cab Structure	Back-Up Alarm and Horn
Bobcat Interlock Control System (BICS™)	Bob-Tach Mounting System
Standard Display (includes keyless start)	Fingertip Auxiliary Hydraulics Control
LED Front and Rear Work Lights	Pressure Release Hydraulic Quick Couplers
Mechanical Suspension Seat	


Options

Radio Remote Control (SJC required)	Automatic Ride Control
Cab with Heat	Heated Cloth Air-Ride Seat
Cab with Heat and Air Conditioning	Side Lighting Kit
Dual Direction Bucket Positioning	Sound Reduction
Radio	Bob-Dock System
Reversing Fan	Power Bob-Tach System
Attachment Control Kit	2-Speed Travel

DOOSAN

Bobcat is a Doosan company.
Doosan is a global leader in construction equipment, power and water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.
©2023 Bobcat Company. All rights reserved.

Dimensions

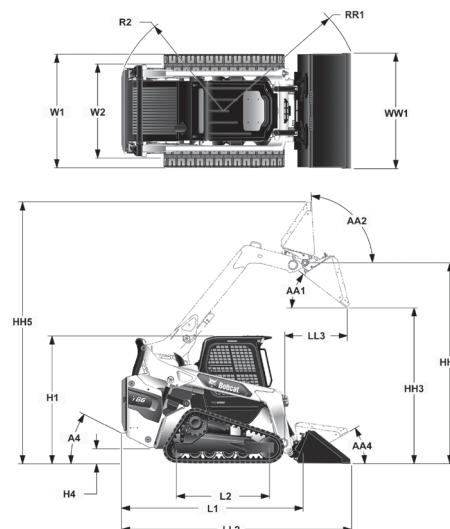

Rear of Machine Clearance Radius	R2	1646 mm
Carry Position Machine Clearance Radius	RR1	2071 mm
Overall Width	W1	1702 mm
Tread(Track Gauge)	W3(W2)	1382 mm
Bucket Width	WW1	1727 mm
Overall Operating Height	HH5	3910 mm
Overall Height	H1	2045 mm
Angle of Departure	A4	25 degrees
Ground Clearance	H4	189 mm
Wheelbase	L3	1378 mm
Length without Attachment	L1	2718 mm
Overall Length	LL2	3427 mm
Maximum Rollback - Fully Raised	AA2	94 degrees
Dump Angle	AA1	37 degrees
Reach - Fully Raised	LL3	933 mm
Dump Height	HH3	2396 mm
Maximum Rollback - Carry Position	AA4	31 degrees
Height to Hinge Pin	HH4	3048 mm

Attachments

Angle Broom	Planer
Auger	Rock Bucket
Bale Handler	Scarifier
Blades — Box, Dozer,	Scraper
Snow, Snow V-Blade	Seeder
Breaker, Hydraulic	Silt Fence Installer
Brush Saw	Snow Pusher
Brushcat™ Rotary Cutter	Snowblower
Buckets	Sod Layer
Chipper	Soil Conditioner
Combination Bucket	Spreader
Concrete Mixer	Stabilizer, Rear
Concrete Pump	Stump Grinder
Digger	Sweeper
Drop Hammer	Tiller
Dumping Hopper	Tilt-Tatch™
Flail Cutter	Tree Spade
Grader	Trench Compactor
Grapples — Farm / Utility,	Trencher
Industrial, Root	Utility Fork
Landplane	Utility Frame
Landscape Rake	Vibratory Roller
Laser Equipment	Water Kit
Mower	Wheel Saw
Packer Wheel	X-Change™ Frame
Pallet Fork	



Bobcat®

Doosan Bobcat Korea Co., Ltd.

www.bobcat.com